

LUMIVERSE

Mini Spark Machine Introduction





MINISPARK

Preferred Quality; Small and compact; Safety Health.

Features

Working height : 2-3m

Working voltage : 110V/60Hz, 220V/50Hz

Fountain direction : Up

Working temperature : -10-50 °C

Maximum power : 400W

Heating system : Electromagnetic heating

Warm up time : < 5 minutes

Control mode : Wireless remote

Clear powder function : Yes

Max powder CY : 50g

Single powder CY : 5-7g

Single working time : 15s

Interface : Dual AC power


Housing material : ABS+PC

N.W. : 1.58kgs

Dimension : 135*135*170mm

Loading capacity : 20GP 9300 PCS / 40HQ 22500 PCS

Multi angle display

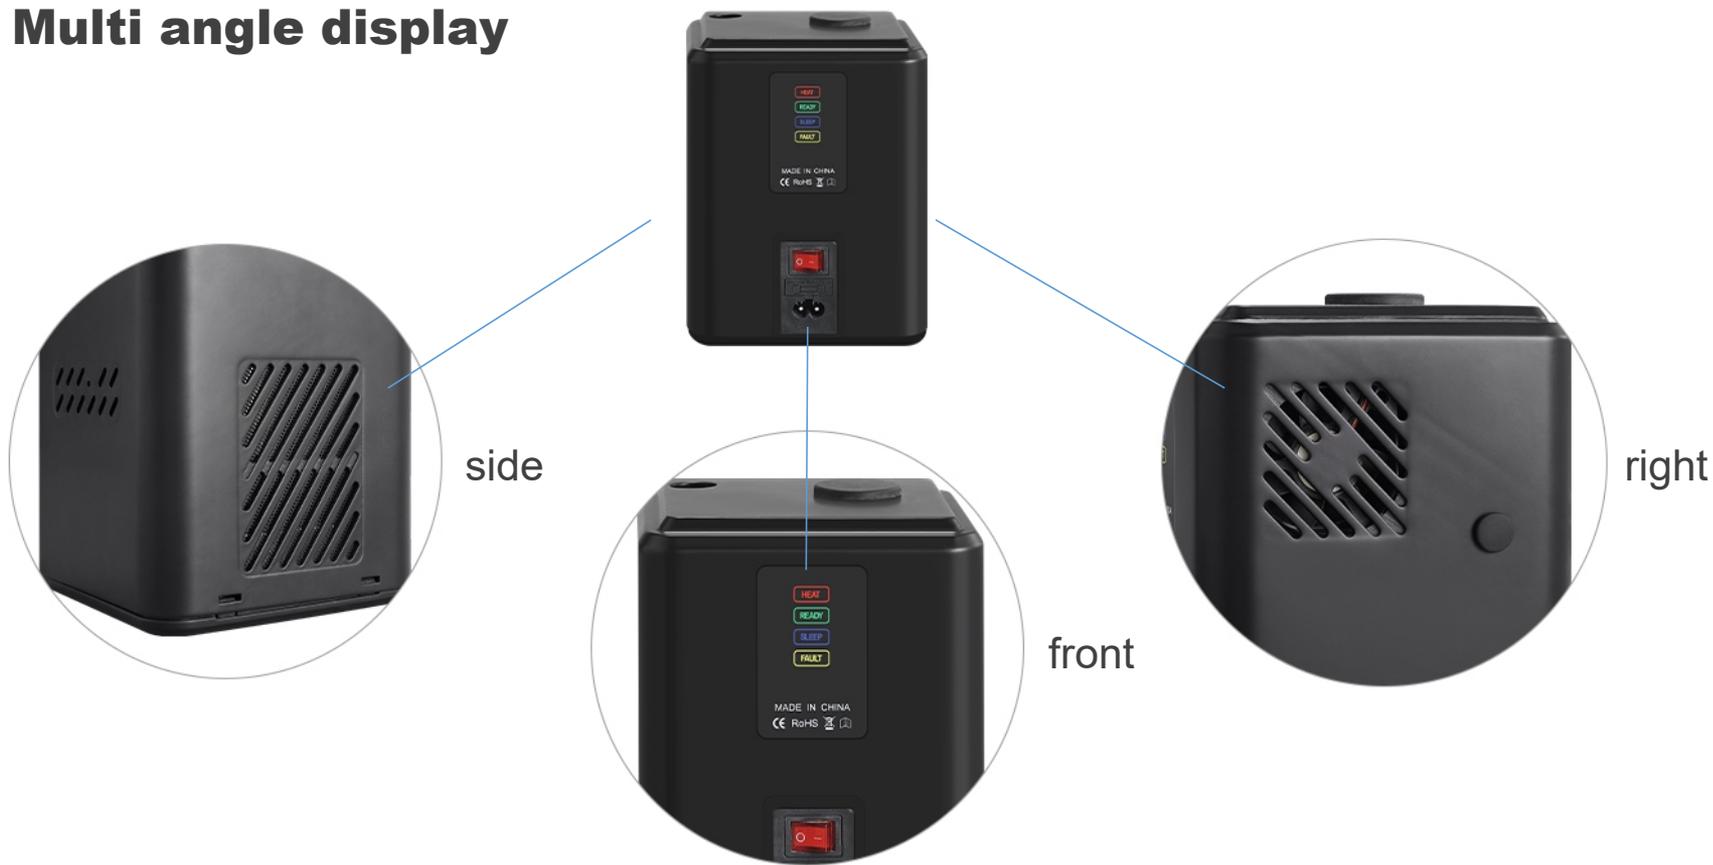

Safe and reassuring


Using non gunpowder consumables

Almost no sparks falling, no smoke or dust, low temperature touchable without burns, enjoy happy moments with peace of mind.





ABS shell oxidation process
Good texture, High stability.

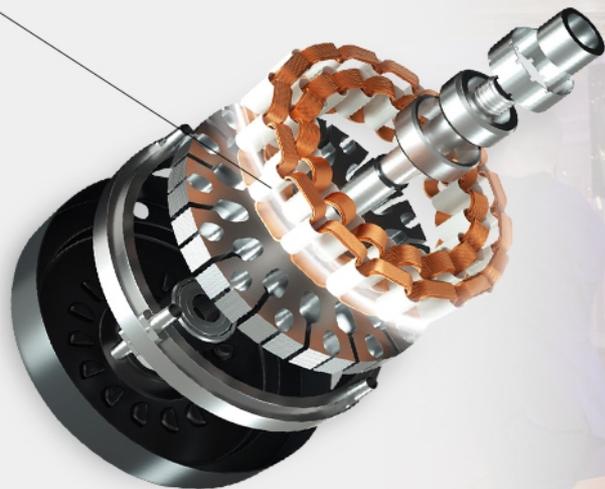

Brushless motor Less noise

Powered by a brushless dual motors, with low noise, providing you with a better atmosphere experience.



LUMIVERSE

Remote control


Convenient and worry free.



LUMIVERSE

Large diameter spray hole

Spray fireworks more fully

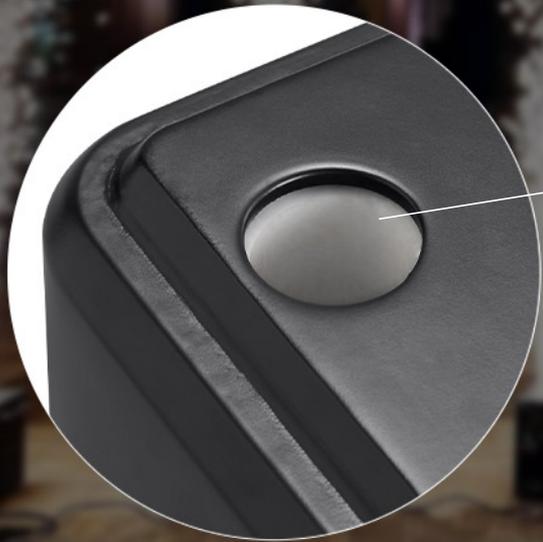

ABS Machine outer box

6-sided independent design,
Good texture and High stability.



Simplified control switch

Simple power cord interface.

Dust prevention and heat dissipation

Comprehensive ventilation and heat dissipation design, ensuring the lifespan of the machine.



LUMIVERSE

Compact lightweight
and easy to carry

Compared to 500ml mineral water



LUMIVERSE



Product shell description

- > Preferred ABS shell oxidation process.
- > Large caliber flamethrower hole.
- > Using non gunpowder consumables.
- > Built in over temperature protection, anti tilt protection, and blower fault protection.



Titanium powder



Remote control



power cord